



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number:

**0 647 041 A1**

## EUROPEAN PATENT APPLICATION

Application number: **94307049.0**

Int. Cl.<sup>6</sup>: **H04H 1/00**

Date of filing: **27.09.94**

Priority: **30.09.93 JP 245453/93**

Date of publication of application:  
**05.04.95 Bulletin 95/14**

Designated Contracting States:  
**DE FR GB NL**

Applicant: **SONY CORPORATION**  
**7-35, Kitashinagawa 6-chome,**  
**Chiyoda-ku**  
**Tokyo (JP)**

Inventor: **Tanaka, Yozo, c/o Sony Corporation**  
**7-35 Kitashinagawa, 6-chome**  
**Shinagawa-ku,**  
**Tokyo (JP)**


Representative: **Ayers, Martyn Lewis Stanley**  
**J.A. KEMP & CO.**  
**14 South Square**  
**Gray's Inn**  
**London WC1R 5LX (GB)**

**Radio data system receiver comprising a power supply circuit controlled by programme type data.**

A signal reproducing apparatus for receiving a broadcasting signal transmitted in the form of a multiplex signal added with data concerning classification of broadcasting content includes a reception unit, a demodulating unit, a signal processing unit, an identification unit and a control unit. The reception unit receives the broadcasting signal. The demodulating unit demodulates an output signal supplied thereto from the reception unit and also demodulates the data concerning classification of broadcasting content contained in the output signal from the reception unit. The signal processing unit or reproduction unit is supplied with an output signal from the demodulating unit and reproduces the output signal supplied thereto. The identification unit is supplied with an output signal from the demodulating unit and identifies the demodulated data supplied thereto. The control unit controls the supply of power to the demodulating unit, the signal processing unit and the identification unit. The control unit energizes the demodulating unit and the identification unit when the power switch of the apparatus is turned off under the condition that a mode for receiving broadcasting of a predetermined broadcasting classification represented by the data concerning the broadcasting content is set. Also, when the identified result from the identification unit shows that the broadcasting of the predetermined broadcasting classification is carried out, the control unit generates a channel selection control signal to the demodulating unit

based on the identified result from the identification unit and energizes the signal processing unit to reproduce a signal obtained when a channel-selected broadcasting signal is demodulated.

FIGURE 3

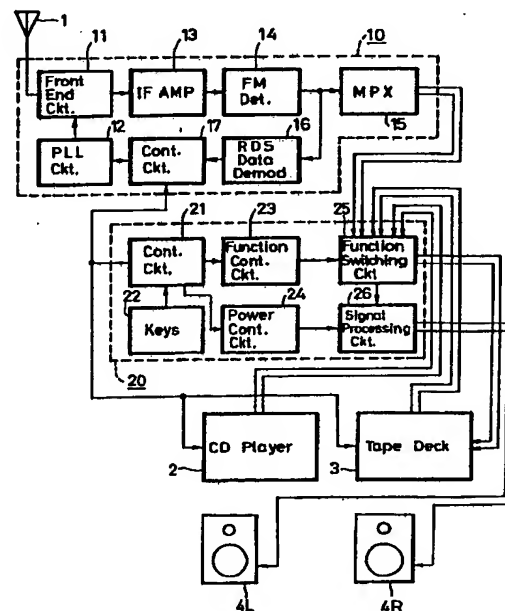

EP 0 647 041 A1

The present invention relates to a reception apparatus, a signal reproducing apparatus using the reception apparatus and a control method thereof. More particularly, this invention relates to a reception apparatus for receiving data multiplex broadcasting, a signal reproducing apparatus using the reception apparatus and a control method thereof.

In European countries, FM audio broadcast service is initiated to broadcast an audio signal in the form of a broadcast signal added with data concerning broadcast contents. This broadcasting service that just started in European countries is called a Radio Data System (RDS). FM broadcasting based on the RDS (hereinafter simply referred to as "RDS broadcast") will be described below.

As shown in FIGURE 1 of the accompanying drawings, a baseband signal of an FM broadcast signal is transmitted in the multiplexed form of a main signal *M* (sum signal  $L+R$  in the case of stereo broadcasting) and a stereo signal *S* - (difference signal  $L-R$ ), and a stereo pilot signal *P* is assigned to a frequency band of 19 kHz. This is the same as the ordinary FM stereo broadcast signal.

In the case of the RDS broadcast, a sub-carrier signal *SC* is assigned to a frequency band of 57 kHz which is three times as high as the frequency of the stereo pilot signal *P*. RDS data *R* is modulated by the sub-carrier signal *SC*.

The RDS data *R* is composed of grouped digital data as shown in FIGURE 2. As shown in FIGURE 2, one group is composed of 4 blocks and each block is composed of 26-bit data. Of 26 bits, 16 bits are assigned to practical data representing broadcast contents or the like, and remaining 10 bits are assigned to an error correction code. The 16-bit data in respective blocks are defined individually.

Data transmitted according to the above-mentioned format are mainly as follows:

PS code ... Character data representing broadcast station name

PI code ... ID (identification) code of broadcast program, country name code, program code, etc.

TP code ... Traffic information broadcast station ID signal

TA code ... Traffic information broadcasting ID signal

PTY code ... Program content ID code representing contents of news, sports and music of each genre

EON code ... ID code representing broadcast contents of other broadcast station

The listener can learn the present broadcast contents of a certain broadcast station by using these codes and also can learn broadcast contents of other broadcast station. By using the TP code

representing that the traffic information broadcasting is carried out, for example, it is possible to for the listener detect that traffic information is broadcast by a broadcasting station (its own or other broadcasting station) represented by other data (PS code, EON code, etc.) transmitted simultaneously.

Accordingly, it is possible to determine by identifying the RDS data superimposed upon the broadcasting signal of this broadcasting station when the listener listens to FM broadcasting of a certain frequency, for example, whether or not other broadcasting station broadcasts traffic information. Therefore, it is possible to prevent the listener from missing desired information, such as traffic information or the like, of the listener.

When the data based on the RDS broadcasting is used as described above, it is necessary for the listener to constantly listen to FM broadcasting (RDS broadcasting) of any broadcasting station. If the FM broadcasting or RDS broadcasting were not received, RDS data would not be received. For this reason, unless traffic information is broadcast by any broadcasting station for a long period of time when the listener wishes to hear traffic information, for example, the listener should keep listening to broadcasting of other broadcasting content for a long period of time until any broadcasting station starts broadcasting traffic information.

In this case, if no sounds are inhibited from being emanated from the speakers of the receiver by adjusting the volume control under the condition that an FM receiver receives the RDS broadcasting, it is possible for the listener to obtain only the RDS data without listening to broadcast sounds. In this case, however, although the listener learns that any broadcasting station broadcasts broadcasting program of desired contents based on the RDS data, such as traffic information, new or the like, it is not possible for the listener to listen to such broadcasting without operating the volume control. There is then the large possibility that the listener will miss the chance of hearing such desired information while operating the volume control.

According to the present invention, there is provided a signal reproducing apparatus for receiving a broadcasting signal transmitted in the form of a multiplex signal added with data concerning classification of broadcasting content. The signal reproducing apparatus includes a demodulating unit, a signal processing unit, an identification unit and a control unit. The demodulating unit demodulates a received broadcasting signal and also demodulates data concerning classification of broadcasting content contained in the received broadcasting signal. The signal processing unit is supplied with an output signal from the demodulating unit and processes and outputs the output signal supplied

thereto in a predetermined signal processing fashion. The identification unit is supplied with demodulated data from the demodulating unit and identifies the demodulated data supplied thereto. The control unit controls the supply of power to the demodulating unit, the signal processing unit and the identification unit. The control unit energizes the demodulating unit and the identification unit when the power switch of the apparatus is turned off under the condition that a mode for receiving broadcasting of a predetermined broadcasting classification represented by the data concerning the broadcasting content is set. Also, when the identified result from the identification unit shows that the broadcasting of the predetermined broadcasting classification is carried out, the control unit generates a control signal which effect the channel selection based on the identified result from the identification unit and energises the signal processing unit.

According to the present invention, there is provided a reception apparatus for receiving a broadcasting signal transmitted in the form of a multiplex signal added with data concerning classification of broadcasting content. The reception apparatus includes a reception unit, a demodulating unit, a data demodulating unit and a control unit. The reception unit receives a broadcasting signal transmitted thereto. The demodulating unit demodulates an output signal supplied thereto from the reception unit. The data demodulating unit demodulates data concerning classification of broadcasting content contained in the output signal from the reception unit. The control unit is supplied with the demodulated data from the data demodulating unit and identifies the demodulated data supplied thereto. In this apparatus, the reception unit, the data demodulating unit and the control unit are energized when the power switch of the apparatus is turned off under the condition that a mode for receiving broadcasting of a predetermined broadcasting classification represented by the data concerning the broadcasting content is set. Also, under this state, when it is detected by the control unit that the broadcasting of the predetermined broadcasting classification is carried out, the control unit generates a detected signal representing that the broadcasting of the predetermined broadcasting classification is carried out and the reception unit carries out channel selection operation.

According to the present invention, there is provided a control method of a signal reproducing apparatus including a reception unit and a signal processing unit. The reception unit receives a broadcasting signal transmitted in the form of a multiplex signal added with data concerning classification of broadcasting content. The reception unit includes a demodulating unit for demodulating a received broadcasting signal and the data con-

cerning classification of broadcasting content contained in the received broadcasting signal and an identification unit for identifying demodulated data supplied thereto. The signal processing unit is supplied with an output signal from the demodulating unit. According to the control method, when the power switch of the apparatus is turned off under the condition that a mode for receiving the broadcasting of the predetermined classification represented by the broadcasting content is set, the reception unit is constantly energized. Under this condition, if the identified result of the identification unit shows that the broadcasting of the predetermined broadcasting classification is carried out, then the reception unit carries out channel selection based on the identified result of the identification unit and the signal processing unit is energized.

According to the present invention, even under the condition that the power switch of the reception unit, the reception apparatus or the signal reproducing apparatus is turned off, if the transmission of the broadcasting signal added with the data concerning the classification of the previously-set broadcasting content is started, it is possible to receive and automatically reproduce the broadcasting signal transmitted in the form of the multiplex signal added with the data concerning the classification of the broadcasting content that is started being broadcast by carrying out predetermined setting.

Thus, there may be provided a signal reproducing apparatus a reception apparatus and a control method of controlling a signal reproducing apparatus in which the above-mentioned problems can be solved.

The invention will be more clearly understood from the following description, given by way of example only with reference to the accompanying drawings in which:

FIGURE 1 is an explanatory diagram showing frequency spectrums of signals used in the RDS broadcasting;

FIGURE 2 is an explanatory diagram showing an example of a data format in the RDS broadcasting;

FIGURE 3 is a schematic block diagram showing an arrangement of a system stereo according to an embodiment of the present invention; and

FIGURE 4 is a flowchart to which reference will be made in explaining operation of the system stereo apparatus according to the embodiment of the present invention.

A signal reproducing apparatus according to an embodiment of the present invention will hereinafter be described in detail with reference to the drawings.

The signal reproducing apparatus according to this embodiment is applied to the FM reception apparatus for receiving the aforementioned RDS broadcasting.

As shown in FIGURE 3, this FM reception apparatus is generally formed as a system stereo apparatus. Specifically, as shown in FIGURE 3, the system stereo apparatus comprises a tuner 10, an amplifying apparatus 20, a CD (compact disc) player 2, a tape deck 3 and left and right speakers 4L and 4R. The FM radio broadcasting such as the RDS broadcasting or the like can be received by the tuner 10.

A circuit arrangement of the tuner 10 will be described below. As shown in FIGURE 3, a signal received at an FM antenna 1 is supplied to a front end circuit 11 provided within the tuner 10. The front end circuit 11 is supplied with a channel selection frequency signal from a PLL (phase-locked loop) circuit 12. Then, the front end circuit 11 mixes the channel selection frequency signal to an input signal supplied thereto from the FM antenna 1 to provide an intermediate frequency (IF) signal of a broadcast wave with a predetermined frequency.

The intermediate frequency signal from the front end circuit 11 is supplied through an intermediate frequency amplifying (IF AMP) circuit 13 to an FM detecting (FM DET) circuit 14 and is thereby detected. A detected signal from the FM detector 14 is supplied to a multiplexer (MPX) 15 which demodulates the detected signal supplied thereto to provide left and right stereo signals. The left and right stereo signals are supplied to a function switching circuit 25 provided within the amplifying apparatus 20. The detected signal output from the FM detecting circuit 14 is also supplied to an RDS data demodulating (RDS DATA DEMOD) circuit 16.

The RDS demodulating circuit 16 demodulates the RDS data which was modulated by the sub-carrier signals SC shown in FIGURE 2, and supplies demodulated data to a control (CONT) circuit 17 formed of a microcomputer provided within the tuner 10. The control circuit 17 performs control operation concerning reception operation, such as control of a reception frequency, of the tuner 10. The control circuit 17 controls a frequency of the channel selection signal output from the PLL circuit 12 based on a control signal supplied thereto from the amplifying apparatus 20 to carry out a reception processing of FM broadcasting with a predetermined frequency. Further, the control circuit 17 identifies contents of data supplied thereto from the RDS data demodulating circuit 16 and supplies identified result to the amplifying apparatus 20. Depending on the set mode, the control circuit 17 automatically switches the reception frequency

based on the identified data.

The amplifying apparatus 20 switches audio signals supplied thereto from the tuner 10, the CD player 2 and the tape deck 3, i.e., switches function modes, and processes the switched audio signal, such as amplifying the audio signal so that the audio signal can be output. Then, the amplifying apparatus 20 supplies the thus processed audio signal to the left and right speakers 4L, 4R. Specifically, the amplifying apparatus 20 includes a control (CONT) circuit 21 formed of a microcomputer. The control circuit 21 is connected with control circuits or controllers (each composed of a microcomputer) of other equipments, such as the tuner 10, the CD player 2 and the tape deck 3 via bus lines. The tuner 10, the CD player 2 and the tape deck 3 can be operated under the control of the control circuit 21. The control circuit 21 is connected with a plurality of keys 22 and information obtained when the key 22 is operated is supplied to the control circuit 21. The control circuit 21 controls operation of the circuit designated by the operation of the key 22 based on the information supplied thereto from the key 22. The listener can set various operation modes, such as an automatic channel selection mode or the like, which will be described later on, in addition to ordinary operation, such as to switch function modes, to switch reception frequencies at the tuner 10, to control volume and to energize and deenergize the whole system of the system stereo apparatus by using the keys 22.

In the case of the system stereo apparatus according to this embodiment, even when a power key (not shown) in the keys 22 is turned off, circuits necessary for executing the operation mode are maintained operable by the control signal supplied thereto from the control circuit 21 depending on the mode set at that time.

Under the control of the control circuit 21, the amplifying apparatus 20 is operated so that the function control circuit 23 switches input audio signals and a power control circuit 24 processes audio output signals.

The function switching circuit 25 switches input audio signals under the control of the function control circuit 23. Specifically, under the control of the function control circuit 23, the function switching circuit 25 switches and supplies the input audio signal to a signal processing circuit 26. Alternatively, the audio signal selected by the function switching circuit 25 can be directly supplied to the tape deck 3 and the tape deck 3 can record the audio signal supplied thereto. Furthermore, it is possible to select other input audio signals apart from the audio signal supplied to the tape deck 3 and the audio signal supplied to the signal processing circuit 26.

The signal processing circuit 26 receives the audio signal selected by the function switching circuit 25 and effects necessary audio signal output processing, such as amplifying or the like on the audio signal supplied thereto under the control of the power control circuit 24. In this case, the signal processing circuit 26 controls output volume based on volume control data supplied thereto from the control circuit 21 through the power control circuit 24.

The control circuit 21 according to this embodiment can perform various control operations based on the RDS data supplied thereto from the tuner 10 after the tuner 10 had received and identified the RDS data. Operation modes that are available in this embodiment are as follows:

(1) Mode (referred to hereinafter as "RDS forced channel selection mode") in which a channel selection frequency is switched to a channel selection frequency of a corresponding broadcasting station if it is determined by the RDS data contained in the received broadcast waves that other broadcast station starts broadcasting broadcast contents (traffic information, news, etc.) registered when the mode is set while the FM broadcasting audio signal received by the tuner 10 is output;

(2) Mode (referred to hereinafter as "RDS forced function switching mode") in which functions are switched by the amplifying apparatus 20 such that the FM broadcasting audio signal of the corresponding station is received by the tuner 10 and that the FM broadcasting audio signal thus received is emanated from speakers 4L, 4R as sounds if it is determined by receiving the RDS broadcasting signal by the tuner 10 that any one of broadcast stations starts broadcasting previously-registered broadcast contents when other audio signals (reproduced audio signals from the CD player 2 and the tape deck 3, etc.) than the FM broadcasting audio signal are output;

(3) Mode (referred to hereinafter as "RDS forced power on mode") in which the FM broadcasting audio signal of the corresponding broadcasting station is received by the tuner 10 and the FM broadcasting audio signal thus received is emanated from the speakers 4L, 4R as sounds if it is determined by receiving the RDS broadcasting signal with the tuner 10 that any one of broadcasting stations starts broadcasting the previously-registered broadcast contents when sounds are not emanated from the speakers 4L, 4R at all under the condition that the power switch of the system stereo apparatus is in its off state; and

(4) Mode (referred to hereinafter as "RDS automatic recording mode") in which the FM broad-

casting audio signal of the corresponding broadcasting station is received by the tuner 10 and the FM broadcasting audio signal thus received is recorded on the tape by the tape deck 3 if it is determined by receiving the RDS broadcasting signal with the tuner 10 that any one of broadcasting stations starts broadcasting previously-registered broadcast contents under the condition that any one of audio signal is output or that the power switch of the system stereo apparatus is in its off state.

Regardless of the mode, if it is determined by the RDS data that the broadcasting of the previously-registered broadcast contents is finished, then the original channel selection frequency is restored. Specifically, in the case of the RDS forced channel selection mode, the channel selection frequency of the original broadcasting station is restored after the broadcasting of the previously-registered broadcast contents was finished under the control of the control circuit 21. Also, it is possible to set any of the above-mentioned operation modes by operating any of the keys 22.

In the case of the RDS forced function switching mode, under the control of the control circuit 21, the function switching circuit 25 is operated so that the original reproduced audio signal is output after the broadcasting of the previously-registered broadcast contents was finished. In this case, if the function switching circuit 25 switches the function mode so that audio signal reproduced from the disc or the tape by the CD player 2 or the tape deck 3 is output, under the control of the control circuit 21, the CD player 2 or the tape deck 3 is set in the pause mode when the broadcasting audio signal is started being output in the RDS forced function switching mode. Also, under the control of the control circuit 21, when the original reproduced audio signal is output after the RDS forced function switching mode was finished, the CD player 2 or the tape deck 3 starts reproducing the disc or the tape from the position at which the CD player 2 or the tape deck 3 was set in the pause mode to stop the reproduction of the disc or the tape temporarily.

In the case of the RDS forced power switch on mode, under the control of the control circuit 21, the system stereo apparatus is de-energized so that no sounds are emanated from the speakers 4L, 4R at all after the broadcasting of the previously-registered broadcast contents was finished. It is possible for the listener to set the RDS forced power switch on mode by operating predetermined keys of the keys 22 when the whole of the system stereo apparatus is de-energized.

In the case of the RDS automatic recording mode, under the control of the control circuit 21, the tape deck 3 is de-energized to stop recording the audio signal on the tape after the broadcasting

of the previously-registered broadcasting contents was finished. Also, under the control of the control circuit 21, the power switch is turned off when the tape deck 3 is automatically energized to start recording the audio signal on the tape after the tape deck 3 had been in its off state. When the CD player 2 is reproducing a piece of music or the like from the compact disc in the RDS automatic recording mode, even if the RDS broadcasting audio signal of the previously-registered content is recorded on the tape by the tape deck 3, the function switching circuit 25 may be de-energized and the audio signal reproduced from the compact disc by the CD player 2 may be emanated from the speakers 4L, 4R as sounds. When the RDS broadcasting audio signal of the previously-registered broadcasting contents is recorded on the tape by the tape deck 3, under the control of the function control circuit 23, the function switching circuit 25 may be energized to switch the function mode so that demodulated RDS broadcasting audio signal is output from the speakers 4L, 4R as sounds instead of the sounds reproduced from the compact disc by the CD player 2.

In any of the above-mentioned operation modes, when the broadcasting audio signal representing broadcasting contents that were previously registered based on the RDS data is automatically output from the speakers 4L, 4R as sounds, the control circuit 21 judges output volume level that was set at that time, and controls volume level so that sounds of proper volume level may be emanated from the speakers 4L, 4R if it is determined that the level of the volume control is lowered completely or that the volume level is smaller than appropriate volume level.

As an example of the operation states presented when the above-mentioned operation modes are set, the RDS forced power switch on mode will be described with reference to a flowchart of FIGURE 4.

As shown in FIGURE 4, in step 101, sounds of any equipment are emanated from the left and right speakers 4L, 4R.

under the condition that respective equipments are energized under the control of the control circuit 21 in the amplifying apparatus 20. It is determined in the next decision 102 by the control circuit 21 whether or not the power key of the keys 22 is depressed to de-energize the system stereo apparatus. If the power key is depressed as represented by a YES at decision step 102, then the processing proceeds to the next decision step 103. It is determined in decision step 103 by the control circuit 21 whether or not any one of the modes in which the broadcasting audio signal of broadcasting content registered based on RDS data is output (or recorded) is set. These modes will be generally

referred to hereinafter as "EON standby mode".

If the EON standby mode is not set as represented by a NO at decision step 103, then the processing proceeds to step 104, whereat respective equipments, such as the tuner 10, the amplifying apparatus 20, the CD player 2 and the tape deck 3 are de-energized. In the de-energized state, the supply of power to respective portions of the equipments is substantially completely stopped except circuits that should be constantly energized, such as a clock circuit and a remote control signal sensing circuit (both of which are not shown).

If the EON standby mode is set as represented by a YES at decision step 103, then the processing proceeds to the next decision step 105. It is determined in decision step 105 whether or not the EON standby mode from the de-energized state is set, or whether or not the RDS forced power switch on mode or the RDS automatic recording mode from the deenergized state is set. If the EON standby mode from the deenergized state is not set as represented by a NO at decision step 105, then the processing proceeds to step 104, whereat the respective equipments are de-energized similarly to step 103.

If the EON standby mode from the de-energized state is set as represented by a YES at decision step 105, then the processing proceeds to the next decision step 106. It is determined in decision step 106 whether or not the RDS broadcasting is now received by the tuner 10. If FM broadcasting on which the RDS data is not superimposed is received, or the tuner 10 is de-energized as represented by a NO at decision step 106, then the processing proceeds to step 107. In step 107, control command is supplied to the control circuit 17 of the tuner 10 so that the tuner 10 may receive any RDS broadcasting.

In the next step 108, respective equipments are deenergized in the EON standby mode. At that time, the circuits that are required by the tuner 10 to receive and identify RDS data, i.e., the front end circuit 11 to the data demodulating circuits 16, the PLL circuit 12, the control circuit 17 and the control circuit 21 provided within the amplifying apparatus 20 are energized.

It is determined in the next decision step 109 by the control circuit 17 provided within the tuner 10 whether or not any broadcasting station starts broadcasting of desired classification of broadcasting content based on received RDS data. If the broadcasting station starts broadcasting of the desired broadcasting classification as represented by a YES at decision step 109, then the processing proceeds to the next step 110, whereat the whole of the system stereo apparatus is energized under the control of the control circuit 21 provided within the amplifying apparatus 20. Also, if the function



mode is not switched to the tuner 10, then the function mode is switched to the tuner 10 (except when only the RDS broadcasting is recorded on the tape by the tape deck 3). At that time, the control circuit 21 automatically adjusts the volume control such that the level of output volume becomes proper volume level. In the case of the mode in which the RDS broadcasting is recorded on the tape by the tape deck 3, the tape deck 3 is placed in the state corresponding to the operation mode under the control of the control circuit 21.

It is determined in the next decision step 111 by the RDS data thus received whether or not the broadcasting of the desired broadcasting classification, i.e., the broadcasting of the currently received broadcasting classification is finished. If it is determined in decision step 111 based on the RDS code that the broadcasting of the currently received broadcasting classification is finished, then the processing returns to step 108, whereat the power switch of the system stereo apparatus is turned off in the EON standby mode. At that time, if the function mode of the system stereo apparatus were switched by the function switching circuit 25 in the immediately-preceding step 110, the function switching circuit 25 would switch the function mode of the system stereo apparatus to the original function mode under the control of the control circuit 21. Similarly, if the output volume level were changed in the immediately-preceding step 110, the volume control would return volume level to the original volume level under the control of the control circuit 21.

While the control circuit 21 in the amplifying apparatus 20 carries out various control operations, such as operation modes shown in the flowchart of FIGURE 4, based on the RDS data received and identified by the tuner 10 as described above, the present invention is not limited thereto and the control circuit 17 in the tuner 10 can control various operations based on these RDS data, i.e., operations in order to execute the RDS forced channel selection mode, the RDS forced function switching mode, the RDS forced power switch on mode and the RDS automatic recording mode. In this case, the control circuit 17 in the tuner 10 identifies demodulated RDS data supplied thereto from the RDS data demodulating circuit 16. If the identified results from the control circuit 17 shows that the previously-set RDS broadcasting was already started, then the control circuit 17 supplies the channel selection control signal to the PLL circuit 12 and also supplies the control signal corresponding to each operation mode to the control circuit 21 of the amplifying apparatus 20. The control signals that are supplied from the control circuit 17 to the control circuit 21 are function switching control signals used to execute operations on the flowchart

of FIGURE 4, such as the control signal for energizing respective units other than the control circuit 21 of the amplifying apparatus 20 to place the amplifying apparatus 20 in the operable state if the operation mode is the RDS forced power switch on mode.

In the operation mode other than the RDS forced power switch on mode, such as the RDS automatic recording mode, a control signal is supplied to a control unit or controller (not shown) of the tape deck 3 through the control circuit 21 of the amplifying apparatus 20. While in that case the amplifying apparatus 20 is directly supplied with the control signal from the control circuit 17 of the tuner 10 as described above, the control circuit or controller of the CD player 2 or the tape deck 3 is supplied with the control signal through the control circuit 21 of the amplifying apparatus 20. In this case, it is possible to supply the control signal from the control circuit 17 to the control circuits or controllers of the CD player 2 and the tape deck 3 by directly connecting the CD player 2 and the tape deck 3 to the tuner 10.

Further, in this case, the tuner 10 includes operation input units used to set the aforementioned operation modes (1) to (4) to thereby set and input the modes and the desired RDS broadcasting set by the operation input units to the control circuit 17. It is needless to say that the amplifying apparatus 20 of this case is an amplifying apparatus having functions corresponding to the aforementioned operation modes (1) to (4).

Furthermore, at least one of the tuner 10 and the amplifying apparatus 20 may include a display unit composed of an LCD (liquid crystal display) or the like to display data based on RDS data demodulated by the RDS data demodulating circuit 16 of the tuner 10. Because RDS data contain data representing genre of a piece of music and character data representing broadcasting station name, the above-mentioned display unit may display thereon these data based on the demodulated RDS data output thereto from the RDS data demodulating circuit 16 under the control of the control circuit 17 or 21.

As described above, it is possible for the listener to receive and listen to or to automatically record on the tape the broadcasting of only the desired broadcasting classification, such as traffic information, news and a piece of music in each genre from the state that the system stereo apparatus is in its off state. Therefore, the FM broadcasting on which the RDS data were superimposed need not be continuously received and the listener need not listen to such received FM broadcasting, i.e., the listener need not listen to useless broadcasting. Thus, the system stereo apparatus according to this embodiment becomes easier to handle

when used as a radio receiver.

If output volume is not at the proper volume level when the RDS broadcasting is automatically received under the condition that the system stereo apparatus is in its off state, then the output volume can be set to the proper volume level automatically as described above. Thus, even when the power switch of the system stereo apparatus is turned off under the condition that the level of the volume control is completely lowered, it is possible to prevent the listener from missing the chance of listening to necessary broadcasting program.

From the state that the system stereo apparatus is in its off state, the RDS broadcasting can automatically be received and the received audio signal can be recorded on the tape by the tape deck 3. As a result, it becomes possible to automatically record only a piece of broadcast music of a certain genre. Thus, it becomes possible to record only the necessary contents of the broadcasting efficiently.

When the RDS broadcasting is automatically received under the condition that the system stereo apparatus is in its off state, if the function mode is set to other function mode than the tuner mode, the function mode can be automatically switched to the tuner mode. Also, after the reception of the RDS broadcasting is finished, the current tuner mode is switched to the original function mode so that it is not necessary for the listener to switch the function mode. Therefore, the system stereo apparatus according to this embodiment becomes easier to handle.

While the present invention is applied to the RDS broadcasting which is now commercially available in the FM broadcasting as described above, the present invention is not limited to the radio broadcasting such as the FM broadcasting or the like and may of course be applied to similar broadcasting services in future television broadcasting, if realized.

Furthermore, while the present invention is applied to the system stereo apparatus, the present invention is not limited thereto and may of course be applied to reception apparatus of a variety of other types, such as a portable cassette player with radio receiver, a car stereo or the like.

Having described a preferred embodiment of the invention with reference to the accompanying drawings, it is to be understood that the invention is not limited to that precise embodiment and that various changes and modifications could be effected therein by one skilled in the art without departing from the spirit or scope of the invention as defined in the appended claims.

## Claims

1. A signal reproducing apparatus for receiving a broadcasting signal transmitted in the form of a multiplexed broadcasting signal added with data concerning classification of broadcasting contents, said signal reproducing apparatus comprising:

demodulating means for demodulating a received broadcasting signal and data concerning classification of broadcasting contents contained in said received broadcasting signal;

signal processing means supplied with an output signal from said demodulating means and processing said output signal supplied thereto in a predetermined signal processing fashion;

identifying means supplied with demodulated data from said demodulating means and identifying said demodulated data supplied thereto; and

control means supplied with identified result from said identifying means and controlling the supply of power to said demodulating means, said signal processing means and said identifying means, said control means being arranged to energize said demodulating means and said identifying means when a power switch of said signal reproducing apparatus is turned off under the condition that a mode for receiving broadcasting of a predetermined classification represented by said data concerning said broadcasting contents is set and to generate a channel selection control signal based on said identified result supplied thereto from said identifying means and to energize said signal processing means when identified result representing broadcasting of said predetermined classification is supplied thereto from said identifying means.

2. A signal reproducing apparatus according to claim 1, further comprising at least one signal source and one switching means and wherein, in use, an output signal from said signal source is supplied through said switching means to said signal processing means and said switching means selectively switches and supplies said output signal of said demodulating means and said output signal of said signal source based on a control signal from said control means to said signal processing means.
3. A signal reproducing apparatus according to claim 2, wherein, in use, said control means controls said switching means such that said output signal from said demodulating means is supplied to said signal processing means with



- priority to said output signal from said signal source.
4. A signal reproducing apparatus according to claim 2, wherein, in use, said control means switches said switching means such that said output signal from said demodulating means is supplied to said signal processing means based on identified result obtained when it is determined by said identifying means that a broadcasting signal added with data concerning classification of said broadcasting content is received under the condition that said output signal from said signal source is supplied to said signal processing means.
  5. A signal reproducing apparatus according to claim 4, wherein, in use, said control means de-energizes said signal source to stop outputting an output signal temporarily, said control means switches said switching means such that said output signal from said signal source is supplied to said signal processing means at the completion of said broadcasting signal added with data concerning classification of said broadcasting content, and said control means energizes said signal source to output an output signal after said signal source is released from a pause mode.
  6. A signal reproducing means according to claim 2, 3, 4 or 5 wherein, in use, said control means generates a channel selection control signal to said demodulating means so that said demodulating means carries out channel selection operation based on an identified result from said identifying means which identified that the broadcasting signal added with the data concerning classification of said broadcasting content under the condition that an output signal which results from demodulating the broadcasting signal, which is not added with said data concerning classification of said broadcasting content, is supplied from said demodulating means to said signal processing means, and switches said switching means such that an output signal obtained from said demodulating means after said demodulating means carried out channel selection operation is supplied to said signal processing means.
  7. A signal reproducing apparatus according to any preceding claim further comprising recording and/or reproducing means for recording and/or reproducing an output signal supplied thereto from said signal processing means through said demodulating means.
  8. A reception apparatus for receiving a broadcasting signal transmitted thereto in the form of a multiplex signal added with data concerning classification of a broadcasting content, said reception apparatus comprising:
    - receiving means for receiving a broadcasting signal transmitted thereto;
    - demodulating means for demodulating an output signal supplied thereto from said receiving means;
    - data demodulating means for demodulating data concerning classification of said broadcasting content contained in said output signal from said receiving means; and
    - control means supplied with demodulated data from said demodulating means and identifying said demodulated data supplied thereto, wherein, in use, said receiving means, said data demodulating means and said control means are energized when said reception apparatus is de-energized under the condition that a mode for receiving broadcasting of a predetermined classification represented by said data concerning said broadcasting content is set, and said control means outputs a detected signal representing that said broadcasting of said predetermined classification is carried out when said control means detects that said broadcasting of said predetermined classification is carried out, and controls said receiving means so that said receiving means carries out channel selection operation.
  9. A control method of a signal reproducing apparatus including receiving means and signal processing means, said receiving means receiving a broadcasting signal transmitted in the form of a multiplex signal added with data concerning classification of broadcasting content, said receiving means including a demodulating unit for demodulating a received broadcasting signal and data concerning classification of broadcasting content contained in said received broadcasting signal and an identifying unit supplied with demodulated data from said demodulating unit and identifying said demodulated data supplied thereto and said signal processing means supplied with an output signal from said demodulating unit, said control method comprising the steps of:
    - energizing said receiving means when said signal reproducing apparatus is de-energized under the condition that a mode for receiving broadcasting of a predetermined classification represented by data concerning said broadcasting is set; and
    - controlling said receiving means such that said receiving means carries out channel se-

lection based on an identified result from said identifying unit when said identified result from said identifying unit represents that said broadcasting of said predetermined classification is carried out under this condition, and energizing said signal processing means.

5

10. A control method of a signal reproducing apparatus according to claim 9, wherein the output signal from said demodulating unit is supplied to said signal processing means instead of an output signal from other signal source when said identifying unit identifies that said broadcasting signal added with said data concerning said classification of said broadcasting content is received under the condition that an output signal from said other signal source is supplied to said signal processing means.

10

15

11. A control method of a signal reproducing apparatus according to claim 9 or 10, wherein said demodulating unit carries out channel selection operation when said identifying unit identifies that said broadcasting signal added with said data concerning said classification of said broadcasting content is received under the condition that an output signal, which results from demodulating a broadcasting signal, which is not added with said data concerning said classification of said broadcasting content, is supplied from said demodulating unit to said signal processing means, and said output signal obtained from said demodulating unit after said demodulating unit carried out channel selection is supplied to said signal processing means.

20

25

30

35

40

45

50

55

10

FIGURE 1

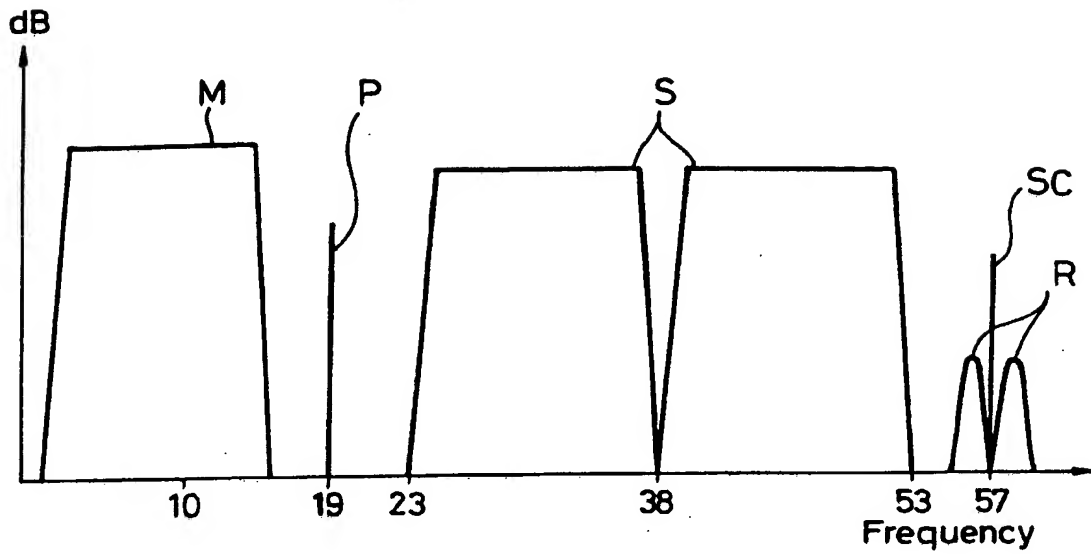


FIGURE 2

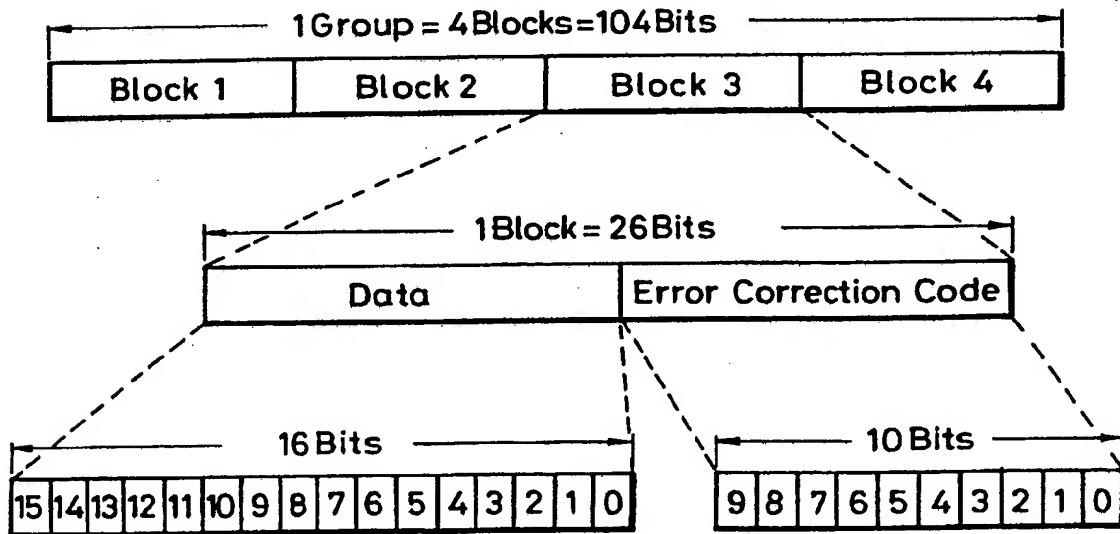


FIGURE 3


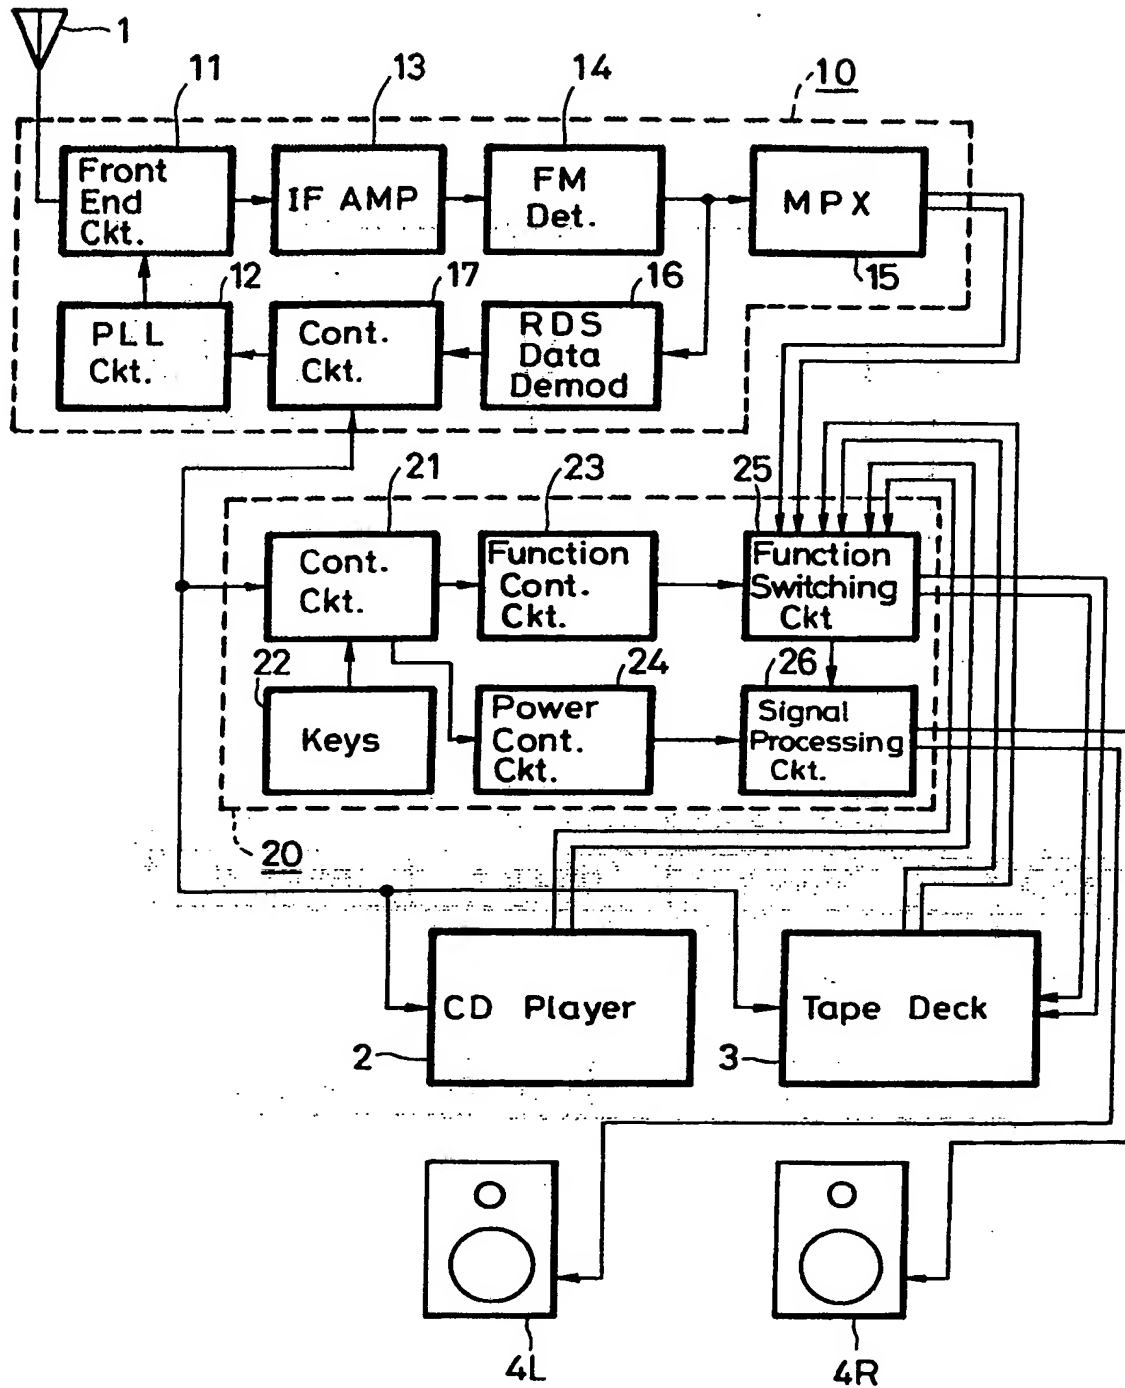


FIGURE 4



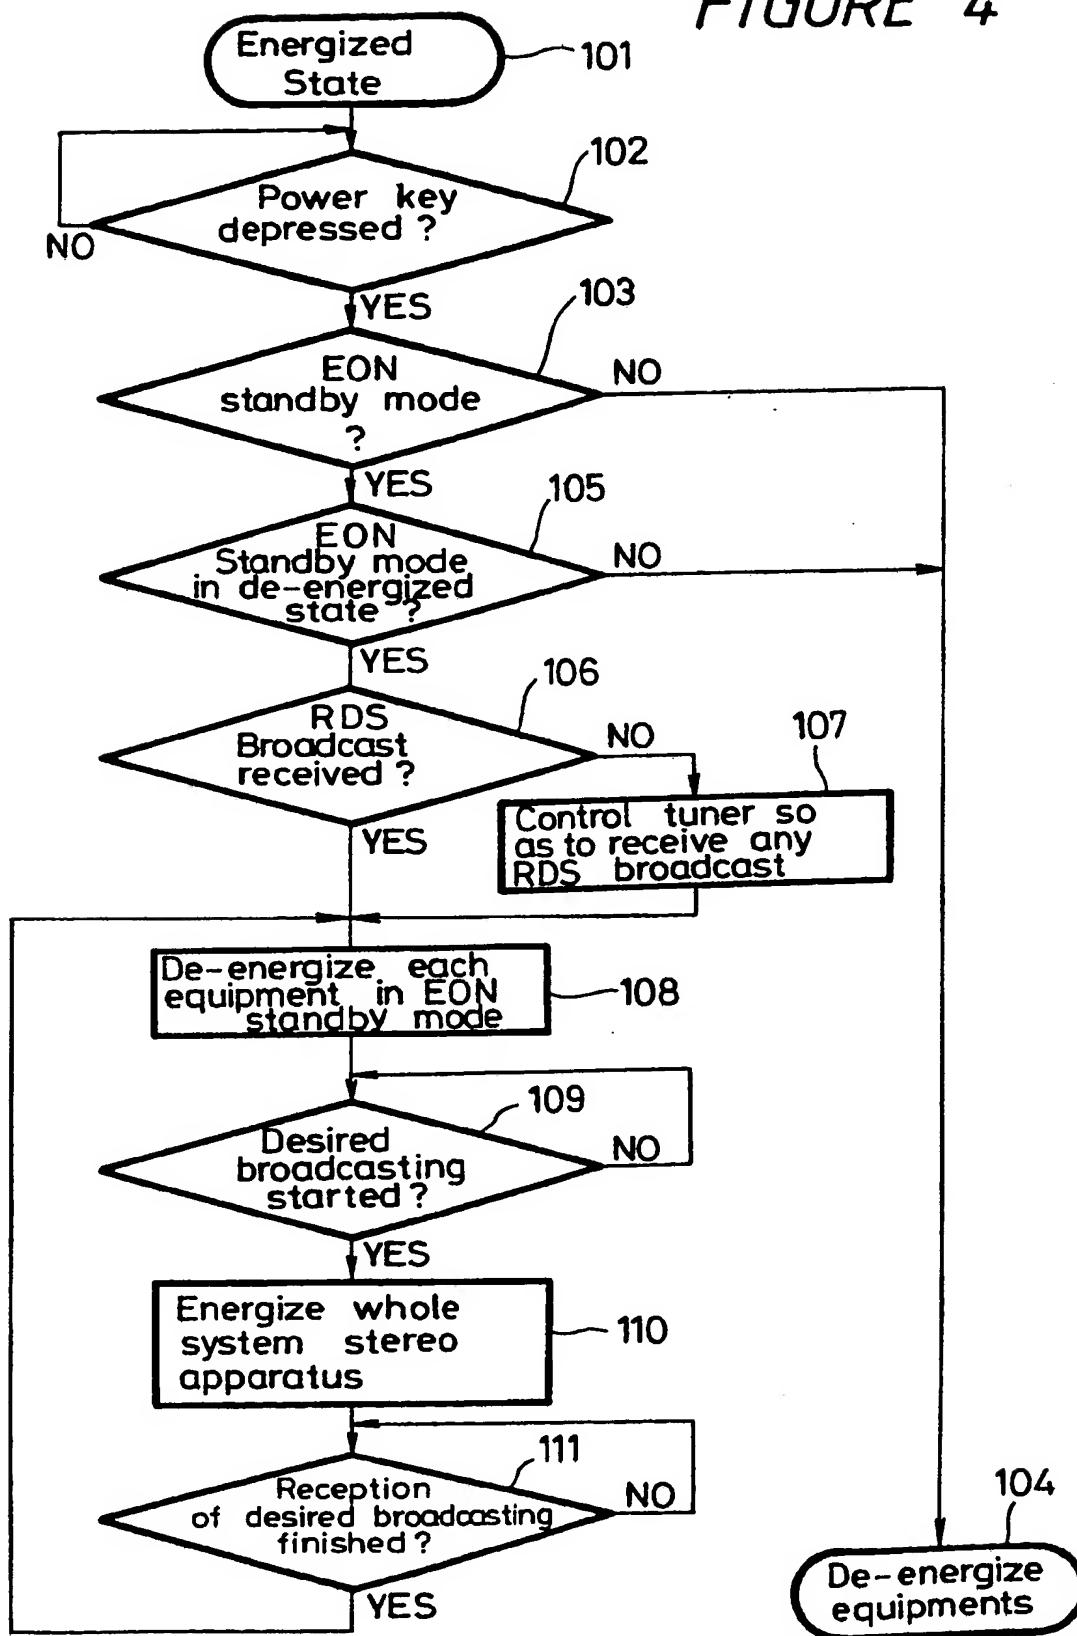

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 94 30 7049

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION
A	DE-A-38 20 639 (ROBERT BOSCH G.M.B.H.) * column 1, line 1 - line 60; claims 1,6; figure 1 * -----	1,8,9	H04H1/00
A	DE-A-40 34 521 (PIONEER ELECTRONIC CORP.) * column 1, line 1 - line 57; claims 1,2; figure 1 * * column 2, line 9 - column 4, line 5 * -----	1,8,9	
A	EP-A-0 386 835 (N.V. PHILIPS GLOEILAMPENFABRIEKEN) * column 1, line 1 - column 3, line 13; claim 1 * -----	1,8,9	
			TECHNICAL FIELDS SEARCHED (Int. CL. 6)
			H04H
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17 January 1995	Examiner De Haan, A.J.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... A : member of the same patent family, corresponding document	

EPO FORM 1503 01/92 (P04/C01)